




Resin SP330

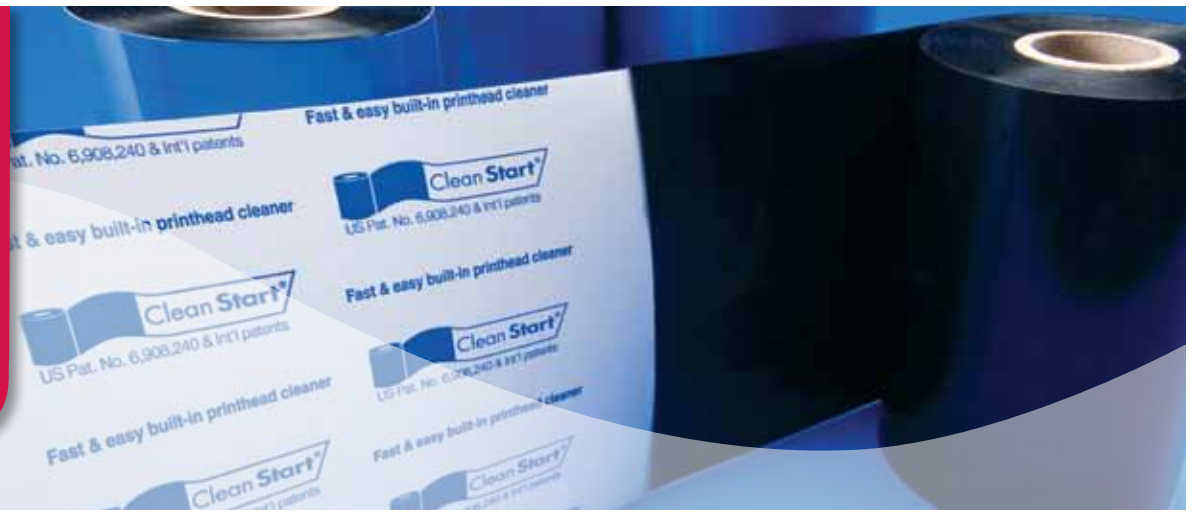

Resin SP330

Excellent durability for heavy duty labeling applications.

Maximum abrasion resistance assures lasting variable barcodes and text. Full resin ribbon bonds to a variety of high-end synthetics, providing excellent scratch and smudge resistance. Image quality is unsurpassed, especially crisp for high-resolution output required for small text and 2D barcodes.

Benefits

- UL/CSA Recognized on Specific Substances
- Excellent Mechanical Durability
- Good Resistance to Typical Chemicals
- Very Dark Black Images with Exceptional Sharpness
- Prints on a Wide Range of Synthetic Receivers
- Anti-Static Formula and Backcoat Extend Printhead Life
- Clean Start® Built-In Printhead Cleaner

Recommended Stocks

- Top-Coated and Print-Treated Polyester
- Polyimide Films
- Polypropylene
- Polyethylene
- Vinyl
- Nylon



The printhead cleaner *built in* your ribbon.

IIMAK Thermal Transfer Ribbons

| PM 308 | Prime Mark | SP330 |
|---|------------|--|
| Wax/Resin <i>High durability to endure rough handling, abrasion, occasional chemical exposure, and outdoor elements</i> | | Resin <i>Maximum durability to resist abrasion, heat, steam, and chemicals</i> |
| Wax Ribbons for General Purpose Labeling GP725 High Mark | | |
| Ribbons for Near Edge Printers and Flexible Packaging Coders NET FLEX NET MARK IQ NET RESIN IQ | | |
| Color Thermal Transfer Ribbons DC100 DC200 DC400 NET Color | | |
| Security Enhanced Thermal Transfer Ribbons UV Invisible | | |



310 Commerce Drive • Amherst, NY 14228
Toll-Free: 888.464.4625 • Phone: 716.691.6333
salesinfo@iimak.com • www.iimak.com



Applications



Industrial



Outdoor



Automotive



Electronics



Medical Devices



Pharmaceutical



Life Sciences



Garment

SP330 Resin

Outstanding mechanical durability for the most demanding applications. Strongly resists abrasion and withstands many common chemicals. Razor sharp images transfer to many premium synthetic tags and labels.



Imaging Characteristics

| Printer | Print Speed | Energy Range |
|----------|-------------|--------------|
| Flathead | 6 IPS | Upper |

| Image Darkness | Scratch/Smudge | Chemical |
|------------------------|--------------------|---------------------|
| >2.2 RD (densitometer) | Highest Resistance | Moderate Resistance |



Technical Specifications

Color Code Tab..... Blue
 Film Thickness..... 4.5 Microns
 Total Ribbon Thickness..... 6.2 Microns
 Transmission Density..... 1.00 MacBeth Scale
 Ink Melting Point..... 110°C/230°F

UL and CSA Labeling Reference

Avery Fasson: UL MH17205, CSA 97198
 FLEXcon: UL MH16635, CSA 99214
 3M: UL MH16411

Sample SP330 Ribbons

Part # CES11019 – 110 mm x 50 m – CSI
 Part # CES11018 – 110 mm x 50 m – CSO

Typical Compliance

REACH – SVHC Free • RoHS/WEEE
 TSCA • CONEG • California Proposition 65
 Additional Regulatory Requirements Upon Request

Industry Leading Customer Service

- Free Clean Start® built-in printhead cleaner
- Free samples
- Free technical support 888.372.0137
- Free 24-hour print tests
- Over 500 SKUs stocked for same-day shipping
- Complete line of over 2,000 SKUs



310 Commerce Drive • Amherst, NY 14228
 Toll-Free: 888.464.4625 • Phone: 716.691.6333
 salesinfo@iimak.com • www.iimak.com
 Thermal Transfer Ribbons made in the USA