

DC100,DC200  
DC400,  
NET Color




## Color Thermal Transfer Ribbons

Excellent print quality with high durability on a broad range of paper and synthetic tags and labels.

### Color Advantages

- Assures quick visual recognition for coding, stocking, tracking and retrieving merchandise
- Applications include color coding, inventory tracking, short run prime labeling, item matching, promotion, and in-line flexible packaging
- Various levels of durability; wax, wax/resin, and resin


### DC 100 – General Purpose Wax

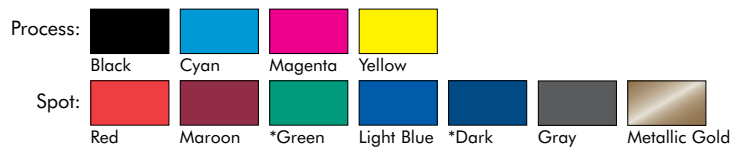


### DC 200 – Premium Wax/Resin



### DC 400 – Super Premium Resin



### NET Color – Near Edge Wax/Resin

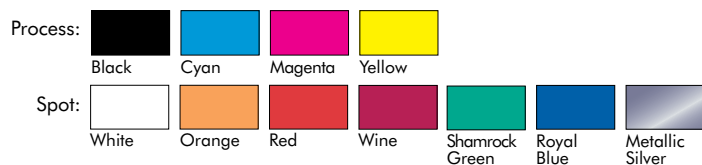

## Color Thermal Transfer Ribbons

DC 100	DC 200	DC 400	NET COLOR
--------	--------	--------	-----------

Available in 30 spot and process colors for flathead and near edge printers, single or multi-head.

*Wax Ribbons for General Purpose Labeling*  
GP725 | High Mark

*Wax/Resin Ribbons for High Durability*  
PM308 | Prime Mark

*Resin Ribbons for Maximum Durability*  
SP330

*Ribbons for Near Edge Printers and Flexible Packaging Coders*  
NET FLEX | NET MARK IQ | NET RESIN IQ

*Security Enhanced Thermal Transfer Ribbons*  
UV Invisible

Swatches are approximate representations of actual colors.

No guarantee can be made as to exact color match.

\*Scannable color: may pass for visible light scanners.



310 Commerce Drive • Amherst, NY 14228  
Toll-Free: 888.464.4625 • Phone: 716.691.6333  
salesinfo@iimak.com • www.iimak.com



## Applications



Snack



Dairy



Produce



Medical



Pharmaceutical



Health/Beauty



Life Sciences



Automotive



Outdoor

# DC100

## General Purpose Wax

### Technical Specifications

Maximum Print Speed..... 8 IPS  
Film Thickness.....4.5 Microns  
Total Ribbon Thickness.... 8.0 Microns  
Ink Melting Point.....68°C/154°F

### Recommended Stock

Uncoated paper tag and label stocks  
Coated paper tag and label stocks  
Polyethylene films

### Sample Color Ribbons

Available Upon Request

### Typical Compliance

- REACH – SVHC Free
- RoHS/WEEE
- TSCA
- CONEG
- California Proposition 65
- Additional Regulatory Requirements Upon Request

# DC200

## Premium Wax/Resin

### Technical Specifications

Maximum Print Speed..... 8 IPS  
Film Thickness.....4.5 Microns  
Total Ribbon Thickness.... 7.4 Microns  
Ink Melting Point.....80°C/176°F

### Recommended Stock

Coated paper tag and label stocks  
Polyethylene films  
Polypropylene films

# DC400

## Super Premium Resin

### Technical Specifications

Maximum Print Speed..... 6 IPS  
Film Thickness.....4.5 Microns  
Total Ribbon Thickness.... 8.0 Microns  
Ink Melting Point.....110°C/230°F

### Recommended Stock

Polyethylene films  
Polypropylene films  
Polyester films

# NET Color

## Premium Wax/Resin for Near Edge Printers

### Technical Specifications

Maximum Print Speed..... 12 IPS  
Film Thickness..... 4.5 Microns  
Total Ribbon Thickness.... 7.5 Microns  
Ink Melting Point.....70°C/158°F

### Recommended Stock

Coated paper tag and label stocks  
Polyethylene films  
Polypropylene films

## Industry Leading Customer Service

- Free Clean Start® built-in printhead cleaner
- Free samples
- Free technical support 888.372.0137
- Free 24-hour print tests
- Over 500 SKUs stocked for same-day shipping
- Complete line of over 2,500 SKUs



310 Commerce Drive • Amherst, NY 14228  
Toll-Free: 888.464.4625 • Phone: 716.691.6333  
salesinfo@iimak.com • www.iimak.com  
Thermal Transfer Ribbons made in the USA