




First in service. Impressions that last.<sup>SM</sup>

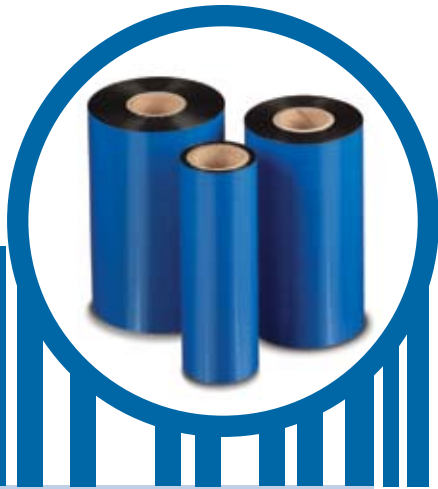

# Wax/Resin

## NET Mark IQ

Near Edge Wax/Resin

### Fast Processing

#### Benefits

- Specially developed for near edge printers
- Produces exceptionally black bar codes and images with no show through
- Broad stock latitude, prints well on both rough, uncoated stocks and smooth, coated stocks
- Mid-range scratch and smear resistance
- Print speeds up to 24 IPS in flexible packaging

#### Recommended Stock

- Coated and Uncoated Polyolefin (i.e. Tyvek)
- Paper Tag & Label Stocks
- Polypropylene
- Polyethylene

#### Technical Specifications

Color Code Tab.....	Copper
Maximum Print Speed .....	24 IPS
Film Thickness.....	4.5
Microns	
Total Ribbon Thickness.....	7.6
Microns	
Transmission Density .....	1.10
	MacBeth Scale
Ink Melting Point.....	
	70°C/158°F



What you need to know to quote ribbon business.

**Thermal Transfer Ribbon STORAGE CONDITIONS**  
 For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

First in service. Impressions that last.<sup>SM</sup>



310 Commerce Drive  
 Amherst, NY 14228  
 Call toll-free: **888.464.4625**  
 Fax toll-free: **888.329.0260**

Order On-line: [www.iimak.com](http://www.iimak.com)  
 Phone: **716.691.6333**  
 Fax: **716.691.3395**  
 Email: [salesinfo@iimak.com](mailto:salesinfo@iimak.com)