

High Mark Resin Enhanced Wax

Low Print Energy Prolongs Printhead Life



Food/Beverage



Health/Beauty



Logistics



Retail



The printhead cleaner *built in* your ribbon.

Benefits

- Outstanding print performance on coated stocks
- Performs well at lower darkness settings for longer printhead life
- Resin-enhanced provides good durability
- Designed for general purpose labeling
- Specially formulated backcoat protects the printhead
- Clean Start® built-in printhead cleaner maintains print quality

Recommended Stocks

Paper

- Vellum
- Matte Coated
- Semi-Gloss
- Gloss
- Floodcoats

Synthetics

- PP / Polypropylene
- PE / Polyethylene

Applications

- Compliance labeling
- Component identification
- Hang tags
- Ingredient lists
- Prepared foods
- Prime label
- Product identification
- Shipping
- Warehousing
- Work in Process (WIP)

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW200	GP725 High Mark DC100	PM250 Prime Mark DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NET330

Technical Specifications

Film Thickness 4.5 Microns
 Total Ribbon Thickness 7.5 Microns
 Transmission Density 1.45 MacBeth Scale
 Ink Melting Point 62°C / 144°F

Imaging Characteristics

Printer Flathead
 Max Print Speed 10 IPS (254 mm/s)
 Image Darkness 1.8 RD (densitometer)

Compliance

- REACH - SVHC Free
- RoHS/WEEE
- California Proposition 65
- Additional Regulatory Requirements Upon Request


Sample SKUs

Part # CES11011 - 110 mm x 50 m - CSI
 Part # CES11012 - 110 mm x 50 m - CSO

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

Performance Ratings

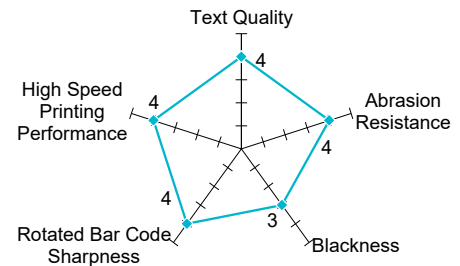

310 Commerce Drive • Amherst, NY 14228
 Toll-Free: 888.464.4625 • Phone: 716.691.6333
 salesinfo@iimak.com • www.iimak.com

V.001_7.2021