

Prime Mark Premium Wax/Resin

Excellent Durability for Mid-Range Applications



Automotive



Chemical



Industrial



Logistics



Medical



Retail



The printhead cleaner *built in* your ribbon.

Benefits

- Stands up to rough handling, abrasion and outdoor elements
- Excellent scratch and smudge resistance
- Resists occasional exposure to mild chemicals
- Low print energy requirements
- Notable performance on glossy papers, BOPP, and PE
- Specially formulated backcoat protects the printhead
- Clean Start® built-in printhead cleaner maintains print quality

Recommended Stocks

Paper

- Semi-Gloss
- Gloss

Synthetics

- PP / Polypropylene
- PE / Polyethylene
- PET / Polyester

Applications

- Asset tracking
- Compliance labeling
- Component identification
- Frozen/cold/wet
- Industrial
- Ingredient lists
- Lumber tags
- Medical devices
- Outdoor
- Pallet labeling
- Plant stakes/tags
- Product identification
- Shelf marking
- Shipping
- Shrink wrap
- Warehousing
- Work in Process (WIP)

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW200	GP725 High Mark DC100	PM250 Prime Mark DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NET330

Technical Specifications

Film Thickness 4.5 Microns
 Total Ribbon Thickness 6.8 Microns
 Transmission Density 1.20 MacBeth Scale
 Ink Melting Point 80°C / 176°F

Imaging Characteristics

Printer Flathead
 Max Print Speed 8 IPS (203 mm/s)
 Image Darkness 1.8 RD (densitometer)

Compliance

- REACH – SVHC Free
- RoHS/WEEE
- California Proposition 65
- UL/CSA recognized on some stocks
- Additional Regulatory Requirements Available


Sample SKUs

Part # CES11023– 110 mm x 50 m – CSI
 Part # CES11022 – 110 mm x 50 m – CSO

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

Performance Ratings

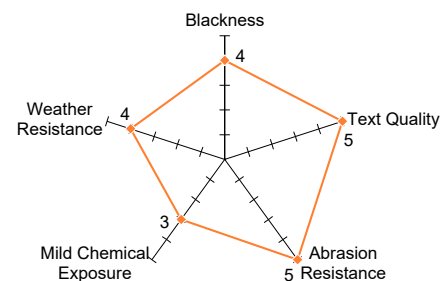

310 Commerce Drive • Amherst, NY 14228
 Toll-Free: 888.464.4625 • Phone: 716.691.6333
salesinfo@iimak.com • www.iimak.com

V.001_7.2021